



## Okanagan Series... for the real *Connaisseur*!

Choose a high-performance custom hood with a thoroughly modern look. Its easy-to-clean stainless steel finish and variable speed blower(s) are ideal for all types of cooking.

- CPM1 available on 28-7/16" and 34-7/16" sizes and CPM2 on 34-7/16", 40-7/16" and 46-7/16" sizes
- Brushed stainless steel finish
- Internal blower 600 CFM on CPM1 and 1080 CFM on CPM2
- Bright halogen lighting:  
Two GU-10, 50W shielded bulbs (included)
- 4-speed, Rotary with Separate On/Off control
- Heat Sentry™ detects excessive heat and adjusts speed to high automatically
- Pro-Style, dishwasher-safe baffle filters with handles
- Vertical discharge 8" round on CPM1 and 10" round on CPM2

Installation is simplified with the Custom Hood Liner insert. All-in-one design includes everything you need to achieve a fully integrated appearance. The Custom Hood Liner easy install system comes with liner, blower, filtration, controls, lighting and damper. Rotary controls for two-level lighting and four blower speeds enable the user to choose operating preferences.


### Specifications

Width	Stainless Steel	Volts	Amps	CFM (max / min)	Sones (max / min)
28-7/16"	CPM1309SS	120	5	600/210	8.5/1.1
34-7/16"	CPM1369SS	120	5	600/210	8.5/1.1
34-7/16"	CPM2362SS	120	9	1000/370	12/1.5
40-7/16"	CPM2422SS	120	9	1000/370	12/1.5
46-7/16"	CPM2482SS	120	9	1080/410	10.5/1.5

### Option

ARP8\* Ariflow reducer (limits the airflow of the hood under 300 CFM)

\* For CPM1 model only

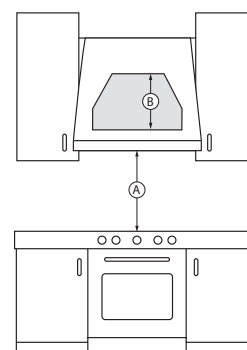

A. Installation height above the cooking surface 24-30"  
B. The distance from bottom of range hood to top of range hood: 11"

