



*A NEW GENERATION
OF RANGE HOODS*

**INSPIRED
BY YOUR
SENSES**

ispira
VENMAR®




INNOVATIONS
INSPIRED BY YOUR SENSES
- ISPIRA





Exclusive technologies. Revamped functions. Enhanced esthetics.
The new generation of Ispira range hoods features innovations that inspire and delight the senses. With their stylish design and trendy colors, Ispira hoods create a unique look to help personalize your kitchen.



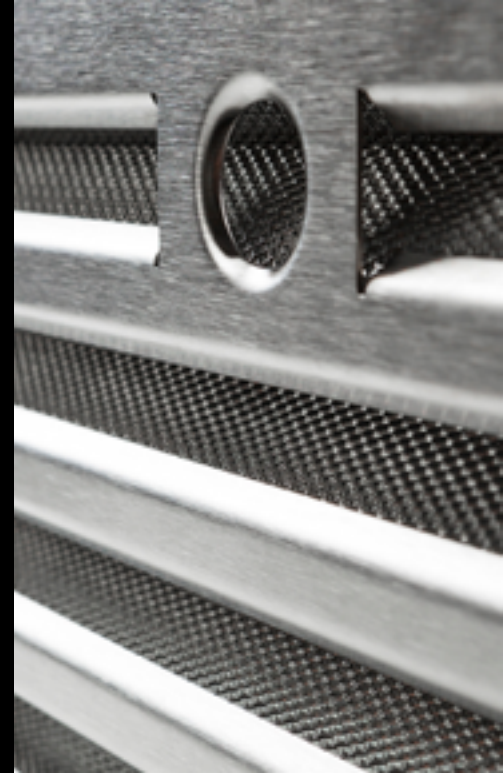

**PUR
LED**

SEE *THE LIGHT*

OUR EXCLUSIVE PURLED™ LIGHT SYSTEM IS MORE THAN JUST A BRILLIANT INNOVATION.

Specially developed by Venmar and certified by Energy Star®, PURLED™ offers even, glare-free lighting across the entire cooking surface, just like in full daylight. This exclusive new LED system **boosts light output by 25%, distributes light 6 times better, improves energy efficiency by 88%, and extends the life of your light bulbs by up to 25 times***. A truly sensational innovation!

- Choice of 4 light settings, including night light
- Comes with 2 LED bulbs (5.5 watt)

SMELL *THE DIFFERENCE AT LAST*

A NEW HYBRID FILTER FOR THE BEST OF BOTH WORLDS.

The new hybrid filter is another Venmar innovation. The perfect combination of two filtering technologies, it **traps up to 28% more grease***, at every ventilation speed. Say goodbye to unpleasant cooking odors and smell the Venmar difference.

- Full-size stainless steel filters
- Easy maintenance, dishwasher-safe

* As compared to previous generation.



TOUCH THE CONVENIENCE

FEATHER-TOUCH INTERFACE: THE PERFECT BLEND OF AVANT-GARDE DESIGN AND STATE-OF-THE-ART TECHNOLOGY.

Ispira control was designed with one thing in mind—to make your life easier! And that's exactly what it does, with easy-to-clean and **easy-to-use LED backlighting feather-touch interface**, a built-in master on/off control, **and automatic last selected speed save function.**

- Heat Sentry™ mode that automatically adjusts ventilation to avoid overheating
- Delay off function for each speed (automatic shut-off after 5 minutes)
- Blue or white LED backlighting

HEAR THE QUIETNESS

AT LAST, AN ULTRA-SILENT BLOWER THAT DOESN'T DROWN OUT THE CONVERSATION.

Whatever the blower speed, Ispira range hoods are amazingly silent: **58% quieter at normal speed**.** The whisper-quiet blower is designed to allow you to cook and entertain at the same time—without having to raise your voice. Because silence is golden!

- Blower power up to 700 CFM
- 4 blower speeds for all your cooking needs

** Data valid for IU600ES model.

GET A TASTE FOR GREAT TRENDS

INTERCHANGEABLE GLASS PANELS ADD A TOUCH OF BOLD COLOR TO YOUR DECOR.


With our exclusive selection of **8 trendy colors**, you can **personalize your decor** to your own tastes. Our easily interchangeable glass panels offer you the **flexibility to create a unique style you can adapt as you please.** Feel like updating your decor? Simply change the glass panel for a new look. Be inspired!





IC700

Chimney range hood

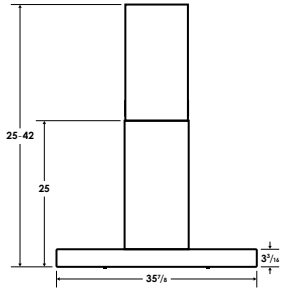

Dimensions shown are in inches.
Depth: 20% in.

Specifications

- 30" and 36" wide
- 700 CFM internal blower*
- 1.4 **sones** at low speed and 2.0 **sones** for the ENERGY STAR® qualified model
- 3 1/4" x 10" vertical or horizontal discharge
- Suitable for 8' to 9' high ceilings

ISPIRA STANDARD

	30 in.	36 in.
Unit with white glass panel		
White	IC70030WH	IC70036WH
ENERGY STAR® qualified unit	IC700ES30WH	IC700ES36WH
Brushed gray	IC70030SS	IC70036SS
ENERGY STAR® qualified unit	IC700ES30SS	IC700ES36SS
Black	IC70030BL	IC70036BL
ENERGY STAR® qualified unit	IC700ES30BL	IC700ES36BL

ISPIRA CUSTOM


Feel like adding your own personal touch?
Order the basic unit and the optional glass panel of your choice.

	30 in.	36 in.
Basic unit	IC70030WG	IC70036WG
ENERGY STAR® qualified unit	IC700ES30WG	IC700ES36WG
Optional glass panels		
White	SV09955WH	SV09956WH
Brushed gray	SV09955SS	SV09956SS
Black	SV09955BL	SV09956BL
Orange	SV09955OR	SV09956OR
Lime	SV09955LM	SV09956LM
Purple	SV09955PU	SV09956PU
Red	SV09955RD	SV09956RD
Emerald	SV09955EM	SV09956EM

Options


Access code to limit CFM to 300	19329
Flue extension for 10' high ceilings	19323

* Range hood airflow, tested by an independent laboratory designated by the Home Ventilating Institute (HVI), at 0.1 in. w.g. static pressure is 600 CFM for the IC700 model and 500 CFM for the IC700ES ENERGY STAR® qualified model.

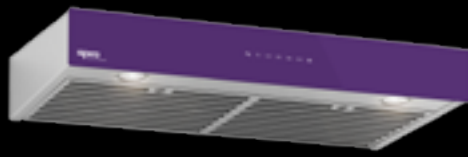

IU600ES

Under-cabinet range hood

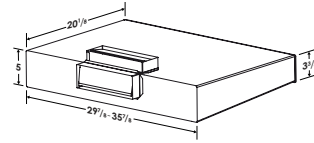

Dimensions shown are in inches.

Specifications

- 30" and 36" wide
- 600 CFM internal blower*
- ENERGY STAR® qualified
- 1.0 **sones** at low speed
- 3 1/4" x 10" vertical or horizontal discharge
- Available in black stainless steel

ISPIRA STANDARD

	30 in.	36 in.
Unit in stainless steel with glass		
White	IU600ES30WH	IU600ES36WH
Brushed gray	IU600ES30SS	IU600ES36SS
Black	IU600ES30BL	IU600ES36BL
Unit in black stainless steel with glass		
Brushed gray	IU600ES30SSBS	IU600ES36SSBS
Black	IU600ES30BLBS	IU600ES36BLBS

ISPIRA CUSTOM

Feel like adding your own personal touch?
Order the basic unit and the optional glass panel of your choice.

	30 in.	36 in.
Basic unit in stainless steel	IU600ES30WG	IU600ES36WG
Basic unit in black stainless steel	IU600ES30WGBS	IU600ES36WGBS
Optional glass panels		
White	SV09953WH	SV09954WH
Brushed gray	SV09953SS	SV09954SS
Black	SV09953BL	SV09954BL
Orange	SV09953OR	SV09954OR
Lime	SV09953LM	SV09954LM
Purple	SV09953PU	SV09954PU
Red	SV09953RD	SV09954RD
Emerald	SV09953EM	SV09954EM

Options


Access code to limit CFM to 300	19329
---------------------------------	-------

* Range hood airflow, tested by an independent laboratory designated by the Home Ventilating Institute (HVI), at 0.1 in. w.g. static pressure is 500 CFM.



IB700

Built-in range hood

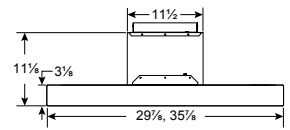

Dimensions shown are in inches.
Depth: 20% in.

Specifications

- 30" and 36" wide
- 700 CFM internal blower*
- 1.4 **sones** at low speed
- 3 1/4" x 10" vertical or horizontal discharge

ISPIRA CUSTOM

Feel like adding your own personal touch?
Order the basic unit and the optional glass panel of your choice.

	30 in.	36 in.
Basic unit	IB70030WG	IB70036WG
Optional glass panels		
White	SV09955WH	SV09956WH
Brushed gray	SV09955SS	SV09956SS
Black	SV09955BL	SV09956BL
Orange	SV09955OR	SV09956OR
Lime	SV09955LM	SV09956LM
Purple	SV09955PU	SV09956PU
Red	SV09955RD	SV09956RD
Emerald	SV09955EM	SV09956EM

Options


Access code to limit CFM to 300	19329
---------------------------------	-------

* Range hood airflow, tested by an independent laboratory designated by the Home Ventilating Institute (HVI), at 0.1 in. w.g. static pressure is 600 CFM.



IS700

Island range hood

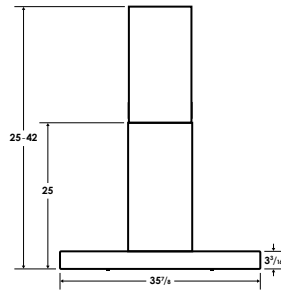

Dimensions shown are in inches.
Depth: 22 in.

Specifications

- **36"** wide
- **700 CFM** internal blower*
- **1.2 sones** at low speed
- **8"** round duct (vertical discharge)
- Suitable for **8' to 9'** high ceilings

ISPIRA STANDARD

36 in.

Unit with glass panels	
<input type="checkbox"/> White (2)	IS70036WH
<input type="checkbox"/> Brushed gray (2)	IS70036SS
<input type="checkbox"/> Black (2)	IS70036BL

ISPIRA CUSTOM

Feel like adding your own personal touch?
Order the basic unit and the optional glass panel of your choice.

36 in.		
Basic unit	IS70036WG	
Optional glass panels	Front (control)	Rear
<input type="checkbox"/> White	SV09956WH	SV09957WH
<input type="checkbox"/> Brushed gray	SV09956SS	SV09957SS
<input type="checkbox"/> Black	SV09956BL	SV09957BL
<input type="checkbox"/> Orange	SV09956OR	SV09957OR
<input type="checkbox"/> Lime	SV09956LM	SV09957LM
<input type="checkbox"/> Purple	SV09956PU	SV09957PU
<input type="checkbox"/> Red	SV09956RD	SV09957RD
<input type="checkbox"/> Emerald	SV09956EM	SV09957EM

Options

Access code to limit CFM to 300	19329
Flue extension for 10' high ceilings	19324
Remote control	21233

* Range hood airflow, tested by an independent laboratory designated by the Home Ventilating Institute (HVI), at 0.1 in. w.g. static pressure is 600 CFM.



SINGLE ISLAND

IK700


Island or chimney range hood



WALL MOUNTED



DOUBLE ISLAND

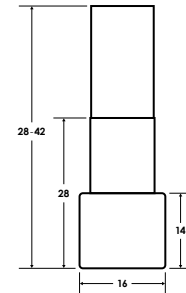

Dimensions shown are in inches.
Depth: 16 in.

Specifications

- **16"** wide
- **700 CFM** internal blower*
- **1.2 sones** at low speed
- **8"** round duct (vertical discharge)
- Suitable for **8' to 9'** high ceilings

ISPIRA STANDARD

16 in.

Unit with glass panels	
<input type="checkbox"/> White (2)	IK70016WH
<input type="checkbox"/> Brushed gray (2)	IK70016SS
<input type="checkbox"/> Black (2)	IK70016BL

ISPIRA CUSTOM

Feel like adding your own personal touch?
Order the basic unit and the optional glass panel of your choice.

16 in.		
Basic unit	IK70016WG	
Optional glass panels	Front (control)	Rear
<input type="checkbox"/> White	SV09958WH	SV09959WH
<input type="checkbox"/> Brushed gray	SV09958SS	SV09959SS
<input type="checkbox"/> Black	SV09958BL	SV09959BL
<input type="checkbox"/> Orange	SV09958OR	SV09959OR
<input type="checkbox"/> Lime	SV09958LM	SV09959LM
<input type="checkbox"/> Purple	SV09958PU	SV09959PU
<input type="checkbox"/> Red	SV09958RD	SV09959RD
<input type="checkbox"/> Emerald	SV09958EM	SV09959EM

Options

Access code to limit CFM to 300	19329
Flue extension for 10' high ceilings	19325
Remote control	21233

* Range hood airflow, tested by an independent laboratory designated by the Home Ventilating Institute (HVI), at 0.1 in. w.g. static pressure is 540 CFM.

CHOOSE
AN ISPIRA
RANGE HOOD

INSPIRED
BY YOUR SENSES

ispira.ca

Venmar Ventilation inc.
550 boulevard Lemire
Drummondville, Quebec J2C 7W9, Canada
1-800-567-3855 • ispira.ca

ispira
VENMAR®